

IPS Academy
Institute of Engineering & Science
Department of Chemical Engineering

Annual Magazine 2024-25

B'Reactive

Dear Faculty members and friends

In continuation of our efforts to inform, educate, and provide a platform for deserving individuals, this edition of the magazine “***B’Reactive***” presents a collection of insightful articles from the IPS Academy, Institute of Engineering & Science, Department of Chemical Engineering. Through this issue, the newsletter seeks to broaden its scope by exploring various aspects of chemical engineering, including surveys that reflect public perceptions and opinions on key topics. At the same time, it remains committed to its core objective — promoting the field of chemical engineering from the grassroots level.

We hope this edition proves to be both informative and enjoyable for our readers.

Editors



Words from the desk of Head



This decade is a time of unparalleled growth and change for India, with the opening up of the frontiers of the world through globalization, there is a need for efficient competence in the global scenario. This need for competence is what that drives our Department to strive for the pinnacle of success. Since its inception in the year 2004, the Department has always strived to create a cadre of professionals who are technically and professionally proficient.

The Department prides itself on preparing the students for creative careers in industries, academia and Government agencies. 400 numbers of students have successfully graduated and are catering to the needs of society.

Our accomplished courses and adept faculties not only endeavor to cover the complete syllabus but to motivate students to learn beyond the syllabus which definitely develops complete knowledge of the subject (practical and theoretical) and develop skill sets of students to become promising engineers in future.

As per the need of current growing trend, the department have initiated post graduation course from 2010 in Chemical Engineering with specialization “Computer Aided Chemical Process Plant Design”. The Department has been successfully carrying out testing & IEDC projects over two years.

Dr. Rajesh Kumar Kaushal
HOD, Chemical Engineering Department
IPS Academy, Institute of Engineering & Science

PrincipalMessage



Technical Education is the most potential instrument for socio-economic change. Presently, the engineer is seen as a high-tech player in the global market. Distinct separation is visible in our education between concepts and applications. Most areas of technology now change so rapidly that there is a need for professional institutes to update the knowledge and competence.

IPS Academy, Institute of Engineering & Science is a leading, premium institution devoted to imparting quality engineering education since 1999. The sustained growth with constant academic brilliance achieved by IES is due to a greater commitment from management, dynamic leadership of the president, academically distinctive and experienced faculty, disciplined students and service oriented supporting staff.

The Institute is playing a key role in creating an ambiance for the creation of novel ideas, knowledge, and graduates who will be the leaders of tomorrow. The Institute is convinced that in order to achieve this objective, we will need to pursue a strategy that fosters creativity, supports interdisciplinary research and education. This will also provide the students with an understanding and appreciation not only of the process of knowledge creation, but also of the process by which technology and knowledge may be used to create wealth as well as achieve social economic goals.

I am delighted to note that the engineering graduates of this institute have been able to demonstrate their capable identities in different spheres of life and occupied prestigious positions within the country and abroad. The excellence of any institute is a measure of achievements made by the students and faculty.

Dr. Archana Keerti Chowdhary
Principal
IPS Academy
Institute of Engineering & Science



IPS Academy Indore
Institute of Engineering & Science
(A UGC Autonomous institute affiliated to RGPV, Bhopal)

Department of Chemical Engineering

IIChE STUDENTS' CHAPTER

Editorial Board Members

- 1) *Mansi Malakar*
- 2) *Sameeksha Paliya*
- 3) *Om Bharwaj*
- 4) *Prem Prakash*
- 5) *Anushka Mishra*
- 6) *Krishna Ojha*

Content

Sr. No	Title	Author
1	Electrochemistry as a driver of decarbonization in the chemicals sector	Mansi Malakar
2	Winter Proof Process: The Hydro-thermal Heating Advantage	Goutam Dugaya
3	Separation Process in Chemical Engineering	Arpit Goswami
4	Advances in Heat Exchanger Design for Sustainable Chemical Processing	Sameeksha Paliya
5	Batch Reactor in Chemical Industry	Pradeep Sihotiya
6	Continuous Stirred Tank Reactor in Chemical Engineering	Kapil Kumar
7	Heat Exchangers in Chemical Engineering	Prem Prakash
8	Bio electrochemical System Treats Wastewater and Generates Biogas	Jay Choudhary
9	Nalco Becomes Nalco Water	Mohd. Zaid Khan
10	Reliable Operation and Sealing of Agitators	Anushka Mishra
11	Optimizing Pressure Relief System	Krishna Ojha
12	Focus on Industrial Hygiene	Kushagra Jain
13	Dr. R.A Mashelkar	Deepshikha Mishra
14	Geothermal Energy	Kanak Goyal

Electrochemistry as a driver of decarbonization in the chemicals sector

Carbon dioxide emissions from the industrial-scale manufacture of chemicals often prove difficult to abate and are on track to increase over the next decade. Industries are able to decarbonize with solar, wind and battery-storage technology. But chemical processes have been intricately optimized around fossil fuels. This reliance is so extensive that the chemicals sector accounts for 10% of global fossil fuel consumption.

We envision three major process technologies growing within a clean chemicals industry:

- electricity-derived heat to power thermochemical processes
- biological pathways, and
- direct electrification via electrochemistry


Electrochemistry is an old technology

Industrial electrochemistry has recently attracted renewed attention surrounding the investment in green hydrogen production. The most widely studied of these is the conversion of carbon dioxide to products like carbon monoxide, formate, ethylene, ethanol, methanol, monoethylene glycol (MEG) and others.

Electrochemical reactions occur via electron transfer, often coupled with proton transfer (that is, oxidations at the anode, reductions at the cathode), and in addition to temperature and pressure, applied voltage acts as a critical knob we can turn to engineer efficient chemical transformations.

Advantages of electrochemistry

Electrochemical approaches to commercial chemical manufacturing can have advantages that go beyond decarbonization.

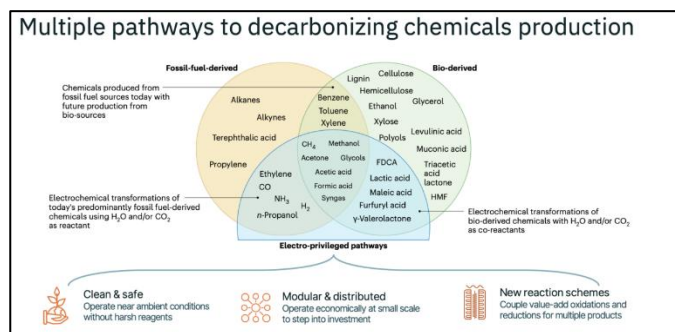

electrochemistry enables the fine-tuning of reaction conditions such that we can achieve more selective partial oxidations and reductions. One example is the partial oxidation of methane to methanol, circumventing the syngas intermediate – a longtime target of the chemical industry.

The long history of successful high-volume production of some chemicals is encouraging, with industrial electrochemistry attracting renewed attention from the major investments in the green hydrogen ecosystem. However, green hydrogen alone is not enough for a sustainability roadmap; the DOE projects that the two leading technologies for chemicals decarbonization, green hydrogen and electrified process heat, can address up to 40% of chemicals-related emissions – but what about the remaining 60%? We believe that this is a moment with unique momentum for industrial electrochemistry beyond hydrogen production, and an excellent opportunity to produce a wide array of green chemicals in a way that is consistent with shareholder expectations. To accelerate the deployment of electrochemical solutions, we must identify the optimal chemical reactions to initially focus on based on economic, technical, and competitive criteria, before scaling up financial capital.

Mansi Malakar

Winter Proof Process: The Hydro-thermal Heating Advantage

Water heating is the most common industrial need in today's manufacturing. Water must be heated when processing food, metal, or pulp and paper. However, heating water often becomes significantly challenging when outdoor temperatures decrease. The outlet fluid must be heated to a precise temperature to run the process correctly and preserve product quality, so winterizing your operation may be required when the ambient inlet water temperature is lowered.

Hydro-thermal gives significant process heating capacity, even under these extreme conditions, with instantaneous on-demand heating, faster startups, and reduced downtime.

The Hydro-Thermal Reliability Advantage

Manufacturers have several heating options, including indirect heating methods like heat exchangers and direct heating methods like Hydro-Thermal's DSI. Heat exchangers utilize a heat transfer barrier that heats water, needing more energy and response time, especially as the ambient temperature declines. Hydro-Thermal's Hydro heater has no barrier and can respond instantly to temperature control. As a result, there is little lag time for temperature changes.

Instantaneous Heat on Demand

Because DSI heating has no lag time, the fluid temperature changes immediately with changes in the regulated steam flow. Therefore, direct steam injection heaters can be regulated as fast and precisely as the


control loop can measure and respond to changes in temperature.

This instant transfer of heat provides two main advantages of direct steam injection: precise temperature control and energy efficiency. More than 20 percent of steam's energy can be as sensible heat. Because it uses both the latent and sensible heat of the steam, a direct steam injection heater requires less steam flow for a given process than indirect heating methods. In addition, condensate return is unnecessary because all the steam's energy is transferred to the process.

Faster Startups

Hydro-Thermal enables timely startup as needed between production runs or enhances emergency preparedness when restarting a process after an outage. This is because of the instantaneous heating that a Hydro-Thermal heating system enables for faster startup. Production can continue seamlessly Instead of waiting for a heat exchanger or another non-sophisticated heating method to elevate the outlet fluid to the correct temperature.

Gautum Dugaya

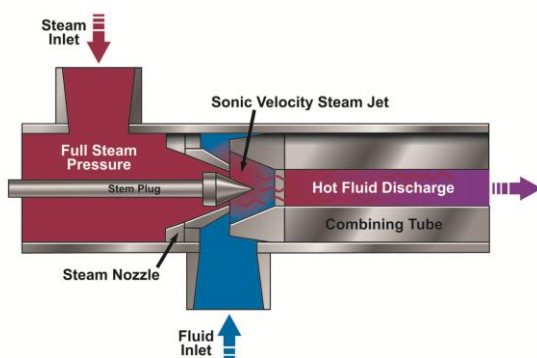

Separation Process in Chemical Engineering

Separation process are as follows:-

Filtration: Separates solids from liquids or gases by passing the mixture through a porous medium that retains the solid particles.

Distillation: Separates components of a liquid mixture based on differences in boiling points. The mixture is heated, and the more volatile component vaporizes and is condensed separately.

Centrifugation: Uses high-speed rotation to separate components based on density differences, with denser particles moving outward.

Extraction: Transfers a solute from one phase to another, typically from a liquid to another immiscible liquid or a solid to a liquid, based on solubility differences.

Adsorption: Involves the adhesion of molecules to a solid surface (adsorbent) based on chemical or physical interactions.

Membrane Separation: Uses semi-permeable membranes to selectively allow certain molecules to pass.

Chromatography: It based on their differential interactions with a stationary phase and a mobile phase.

Crystallization: Induces the formation of solid crystals from a solution or melt, separating the desired compound from impurities.

Evaporation: Removes a liquid (usually water) from a solution by heating, leaving behind the non-volatile components.

Flotation: Separates hydrophobic particles from hydrophilic ones by attaching air bubbles to less dense particles, causing them to float.

Absorption: Selectively removes a component from a gas or liquid by dissolving it into a liquid absorbent.

Leaching: Dissolves specific components from a solid mixture using a liquid solvent (e.g., extracting gold from ore with cyanide).

Arpit Goswami

Advances in Heat Exchanger Design for Sustainable Chemical Processing

Heat exchangers are vital components in chemical engineering, responsible for transferring heat between fluids at different temperatures. In a world that increasingly demands energy efficiency and sustainability, innovations in heat exchanger technology are key to reducing environmental impact and improving chemical process operations.

The Role of Heat Exchangers


Heat exchangers are used in various chemical processes such as distillation, absorption, and reactor cooling. Their primary function is to recover and manage thermal energy. Traditional designs like shell-and-tube exchangers have been widely used, but as energy costs rise and environmental regulations tighten, more efficient designs are needed to improve heat recovery and reduce energy losses.

Design and Material Innovations

Recent advances include **compact designs** such as plate-fin, spiral, and micro channel heat exchangers. These offer higher heat transfer rates and smaller footprints, which are ideal for space-limited environments. **Additive manufacturing (3D printing)** allows for the creation of complex geometries, enhancing heat transfer efficiency. Additionally, **corrosion-resistant materials** and **composite alloys** improve durability and extend the operational lifespan of heat exchangers in demanding environments.

Nanotechnology and Advanced Fluids

The integration of **nano fluids**, which contain nanoparticles like aluminum oxide or carbon nanotubes, is gaining popularity due to their enhanced thermal conductivity. These fluids improve the performance of heat exchangers, especially in compact systems. Moreover, **phase-change materials (PCMs)** and **heat pipes** are being used to store and regulate thermal energy, contributing to energy efficiency in chemical processing.

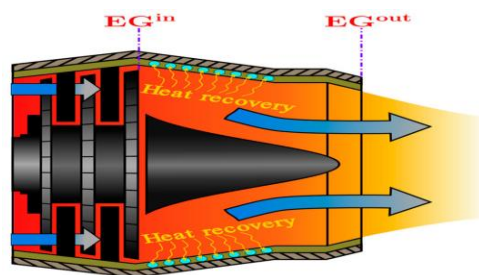

Computational Tools and AI

Advances in **computational fluid dynamics (CFD)** and **AI optimization** have revolutionized heat exchanger design. CFD simulations provide detailed insights into fluid flow and heat transfer, helping engineers optimize performance without physical prototypes. AI is also used to monitor real-time operations, predict fouling, and adjust parameters to maintain optimal energy efficiency.

Sustainability and Circular Economy

Innovative heat exchangers are central to **sustainable chemical processing**. By improving heat recovery and reducing energy losses, they contribute to a **lower carbon footprint** and reduced reliance on non-renewable energy sources. Many of these designs are modular and recyclable, supporting the principles of the **circular economy** and improving the sustainability of chemical plants.

Looking Ahead

The future of heat exchanger technology will continue to focus on **sustainability** and **energy efficiency**. As the industry moves toward **carbon-neutral** operations, advancements in heat transfer technologies will be essential. Hybrid systems that combine heat exchangers with renewable energy sources are becoming increasingly viable, paving the way for greener chemical processing in the coming decades.

Sameeksha Paliya

Batch Reactor in Chemical Industry

Batch reactors are widely used in chemical engineering for processes where precise control over reaction time and conditions is required. These reactors operate by loading all reactants into a vessel at the start of the process, allowing the reaction to proceed for a specified time, and then discharging the products. The design of a batch reactor typically includes an enclosed tank equipped with an agitator to ensure uniform mixing, as well as systems for heating or cooling to maintain the desired temperature. Batch reactors do not allow the continuous addition or removal of material during the reaction, making them ideal for small-scale production, laboratory research, and the manufacturing of specialty chemicals or pharmaceuticals. One of the main advantages of batch reactors is their operational flexibility. They can handle multiple reaction steps,

Changing formulations, and varied production volumes without major design changes. This makes them particularly suitable for processes involving high-purity products or frequent product changes. However,

batch reactors are generally less efficient for large-scale production compared to continuous reactors like CSTRs or plug flow reactors. They also require more manual intervention, scheduling, and downtime between batches. Despite these limitations, batch reactors remain essential in industries where flexibility, control, and product quality are top priorities. Engineers focus on optimizing mixing, heat transfer, and reaction time to maximize productivity and safety

Pradeep Sihotiya

Continuous Stirred Tank Reactor in Chemical Engineering

The Continuous Stirred Tank Reactor (CSTR) is one of the most commonly used reactors in chemical engineering. It is especially prevalent in processes involving liquid-phase reactions. ACSTR is designed to operate continuously, with reactants entering the reactor and products exiting at the same rate, while ensuring a uniform composition and temperature within the reactor through constant stirring.

Ideal Mixing: CSTRs are designed to achieve perfect mixing, meaning the composition of the outflow is the same as the composition inside the reactor.

Continuous Operation: Unlike batch reactors, CSTRs operate continuously, with reactants entering and products leaving the reactor at steady rates.

Solids and Slurries: CSTRs can handle solids and slurries, which is a benefit for certain chemical processes.

Temperature Control: CSTRs allow for easy temperature control, which is important for maintaining reaction rates and preventing overheating.

Residence Time: The time reactants spend in the reactor (residence time) influences the reaction conversion. CSTRs can have a wide residence time distribution.

Applications: CSTRs are used in various industrial processes, including biogas production, pharmaceutical synthesis, and polymerization.

Non-Ideal Behavior: In reality, reactors deviate from ideal behavior, and factors like mixing imperfections and heat transfer limitations can affect reaction outcomes.

Residence Time Distribution: While CSTRs are ideal for perfect mixing, the residence time distribution can be broad, which may not be suitable for all reactions

Kapil Kumar

Heat Exchangers in Chemical Engineering

- Heat exchangers are essential devices in chemical engineering used to transfer heat between two or more fluids at different temperatures. They play a critical role in various industrial processes including power generation, chemical processing, refrigeration, and air conditioning,
- The most common types of heat exchangers include shell-and-tube, plate and air-cooled exchangers. In a shell-and-tube heat exchanger, one fluid flows through a set of tubes while the other fluid flows around the tubes within a larger shell. Plate heat exchangers consist of multiple thin plates stacked together, allowing fluids to flow in alternating channels. These provide high heat transfer efficiency and are compact in size.
- Heat exchangers operate under different flow configurations such as parallel flow, counter flow, and cross flow. Counter flow arrangements, where fluids flow in opposite directions, generally offer the highest efficiency.
- Designing a heat exchanger requires consideration of factors like heat transfer coefficients, fouling resistance, pressure drops, and material compatibility. Engineers use thermal design methods and simulation tools to optimize performance and ensure energy-efficient operation.
- Heat exchangers contribute significantly to energy conservation and process optimization in the chemical industry. Continued advancements in materials, design, and manufacturing are leading to more compact, efficient and durable systems.

Advancing With Automation

Many, if not most, of us have heard of the Industrial Internet of Things (IIoT). Simply

stated, it refers to the manufacturing application of the Internet of Things, or the interconnectedness of “smart” machines. Similar to what we see with the rapid advances to our personal devices, such as smart phones, smart cars, smart televisions and more, smart devices in industrial settings offer the ability to move to new manufacturing strategies.

A number of the new technologies that are enabling the IIoT include mobile devices, self-learning machines, drones, 3-D visualization, cloud applications and more. At the recent ARC Industry Forum, “Industry in Transition: Navigating the New Age of Innovation” (February 8–11; Orlando, Fla.), Andy Chatha, president of ARC, suggested that more “connected” products are and will continue to be available for the production environment. Just as an automobile company can monitor cars in the field, he envisions that industrial machine manufacturers would be able to monitor their equipment (pumps, for example) over the lifetime of the asset. Chatha expects that the “cloud connected plant is at hand,” with connected machines, supply chains and workers. Designing for connectivity, however, needs to be done from the start.

A Significant Step toward a New Process-Automation System

Cybersecurity and open platforms for interconnectivity are important challenges for advances in process automation. Lockheed Martin (Bethesda, Md.; www.lockheedmartin.com) was recently contracted by ExxonMobil Research and Engineering Company (EMRE) to develop a “next-generation” open automation system for process industries. According to EMRE’s vice president of R&D, Vijay Swarup, “This breakthrough initiative could help transform refining and chemical manufacturing through the

use of high-speed computational components, modular software, open standards and the use of autonomous tools.” The intention is to design the platform with intrinsic cybersecurity protection that can be adapted to emerging threats. This development represents a new approach to process automation.

Training with New Technology

One way in which technology can enhance manufacturing procedures is through training programs with advanced simulators. While there is much going on with 3-D immersive simulators for training, advanced screen simulators can address a number of the challenges facing today’s plants, such as engaging new operators in a familiar “game-like” environment, providing realistic “hands-on” training and preparing operators to respond to unplanned events. Simulators can help, for example, to manage alarms (see our two-part feature on alarm management in this issue, pp. 50–60). At the ARC Forum, Ron Cisco, O&M supervisor IV with the Salt River Project – Coronado Generating Station, gave an insightful presentation on how use of a modern-day simulator resulted in an “observable increase in confidence and knowledge levels of trainees.”

Keeping up-to-date with the latest technologies in process automation is increasingly important for the chemical process industries (CPI), as the advances are coming quickly and can bring significant changes to the way manufacturing plants operate. While caution in implementing new systems is warranted, the new technologies offer a wide breadth of new possibilities.

Prem Prakash

Bio electrochemical System Treats Wastewater and Generates Biogas


The first full-scale installation of a unique Bio electrochemical wastewater-treatment system was recently started up at a California brewery. The system, known as the EcoVolt Reactor, was developed by Cambrian Innovation Inc. (Boston, Mass.; www.cambrianinnovation.com). EcoVolt Reactor is a microbial reactor system that eliminates around 90% of biological oxygen demand (BOD) in wastewater while generating methane from the organic carbon.

The EcoVolt Reactor system works by applying a small electric current to an electrochemical cell containing naturally occurring bacteria species. The applied current activates metabolic reaction pathways that would not be possible in normal anaerobic microbial respiration. The anaerobic microbes are grown on a fixed film that is designed for enhanced stability, says Justin Buck, co-founder and chief technology officer at Cambrian. The system is related to a microbial fuel cell, Buck explains, but instead of generating a current from the biological redox reactions, a small current is added to stimulate desired anaerobic respiration pathways and products. The current also provides continuous feedback in real time, allowing the system to monitor itself.

The initial EcoVolt Reactor installation treats high-BOD spent brewery water at a California craft beer facility, producing enough biogas to generate 130 kW of renewable electricity and 45,000 therms of heat per year in a combined heat and power (CHP) system. Downstream polishing units (EcoVolt MBRs — aerobic membrane bioreactors) remove the remaining BOD and trace solids, producing clear, reusable water (80,000 gal/d). The EcoVolt system allows the brewery to cut its water footprint by 40% while producing more than 20% of its energy demand.

The EcoVolt Reactors are modular, railcar-sized units that are road-transportable and fully automated, so capacity can be expanded by adding units, Buck says. Cambrian is looking for its first applications in the beer and wine-making space because the wastewater from those processes disrupts municipal water treatment systems and comes with significant expense to producers, Buck says. It may expand to other applications in the future.

Jay Choudhary

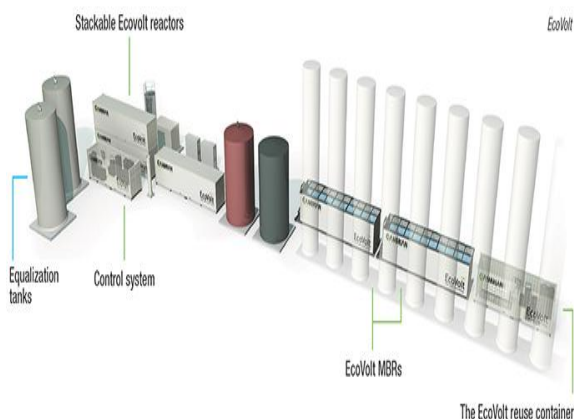

Nalco Becomes Nalco Water

A global leader in water, hygiene and energy technologies and services, has changed the name of Nalco its water and process services business to Nalco Water (nalco.ecolab.com). The new name more clearly communicates Nalco's water-management expertise, as water scarcity is becoming a major global challenge and an increasing constraint to business growth.

"Nalco Water brings unparalleled water management expertise to customers around the world," says Christophe Beck, Ecolab executive vice president and president of Nalco Water. "Water is integral to our customers' key processes, and as demands on the world's limited fresh water resources increase, Nalco Water's role in helping customers enhance productivity and improve product quality while using less water and energy will be more important than ever."

Nalco Water provides water and process services to customers in a range of industries including food and beverage, buildings and institutions, manufacturing, paper, power, primary metals, chemicals and mining.

Nalco Water will continue to deliver total water management solutions through a comprehensive approach that minimizes water use to maximize operational performance at optimized cost. The company offers industry-leading solutions such as 3D TRASAR Automation Technology to meet the complex water management needs of its customers.

"The demand for fresh water is expected to grow by 40% by 2030, placing pressure on businesses to rethink how they manage their water," Beck says. "To address these challenges, businesses around the world are setting ambitious water goals. Nalco Water and Ecolab are partnering with those businesses to reduce, reuse and

recycle water to help achieve their goals and preserve natural resources."

Nalco Water, which is headquartered in Naperville, Ill., merged with Ecolab in 2011. The name change will not affect Nalco Champion, Ecolab's energy services business.

Mohd. Zaid Khan

Reliable Operation and Sealing of Agitators

Mechanical seals, as required by most vessel agitators, are systems sufficiently complex to warrant a good understanding by engineers and appropriate training for operators

To ensure safe and reliable agitator operation, the sealing of the rotating shaft is of fundamental importance. Depending on the operating conditions such as pressure, temperature and speed various sealing principles may be used. A comparison of their characteristics with the requirements for mixing shows that mechanical seal technology offers many advantages over other sealing methods. In particular, when hazardous substances are being mixed or an explosive atmosphere is present, the use of a mechanical sealing system is almost mandatory, especially if the mixing vessel operates at elevated pressure and temperature.

Agitator Seal Systems Compared

A reliable mechanical design for an agitator (Figure 1) must take into account the hydraulic loads on the impellers, which in turn create the torques and bending moments that exert mechanical loads on agitator components such as the shaft, bearing and gearbox. Secondary loads, such as oscillations, vibrations and noise emissions also play important roles.

Shaft seals can be divided into two main groups: radial and axial seals. The main difference between these two groups is the direction in which the contact forces act.

Typical types of radial shaft seals include radial sealing rings, lip seals and stuffing boxes. Here,

the sealing effect is provided by radial forces, and the length of the cylindrical sealing gap is in the axial direction. Although radial seals are relatively insensitive to axial displacement, radial shaft deflections lead to higher sealing forces on one side, which may cause leakage and accelerate wear.

In contrast, the sealing forces in axial shaft seals act in the axial direction. This results in a horizontal sealing surface with a concentric circular cross-section. Owing to their design, axial shaft seals are relatively insensitive to radial shaft deflections and are thus very suitable for agitator applications. Axial displacements have to be compensated with elastic elements. Mechanical seals belong to the group of axial shaft seals. Below, some examples of each type of seal are discussed in more detail




Stuffing boxes. Historically, stuffing-box packings are the oldest type of sealing element. The term “stuffing box” originates from early steam ship construction. The passage for the shaft through the hull was sealed with oil-soaked rags that were stuffed into the gap between the shaft tube and the housing. The first mixing vessels were often equipped with a stuffing box.

Lip seals. In mixing applications, the working principle of lip seals can be in either the radial or the axial direction. Cup collars, which provide axial sealing, can be shifted to different positions along the shaft. A cup collar whose lip runs along the surface of the mounting flange can protect surrounding equipment from steam or other vapors inside the mixing vessel, though it works only for vessels operating at atmospheric pressure. Radially acting lips— usually made from a modified polytetrafluoroethylene (PTFE) material— are also used to seal mixing vessels. These shaft lip seals, however, must be equipped with relatively complicated bearings to limit shaft deflections within the seal housing to about 0.01 mm. This is the only way to operate the lips reliably at pressures of up to 6 bars.

Hermetic seals. To hermetically seal a mixing vessel using only static seals, the mechanical energy required at the impellers must be transmitted through the wall of the closed vessel. The input torque of a magnetic drive is transmitted to the shaft through a canister using permanent magnets.

Mechanical seals. Mechanical seals with dynamic sealing elements are regarded as technically tight when pressurization of the seal liquid is able to maintain a positive pressure gradient between the seal liquid chamber of the mechanical seal and the product in the vessel. Most mechanical seals used with agitators have two pairs of sealing rings: two rotating and two stationary rings (Figure 3). These pairs of rings form an enclosed space—the seal chamber—that can be filled with seal liquid. The contents of the vessel can be reliably sealed against the surroundings by applying pressure to the seal liquid.

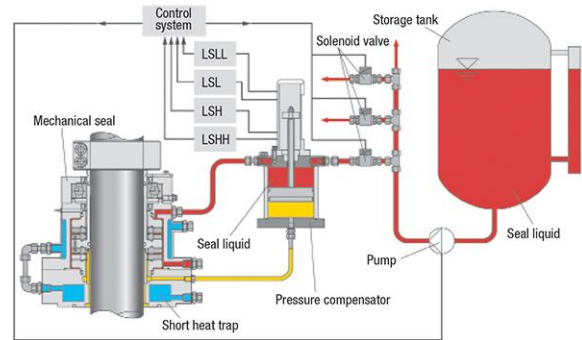

If the seal-chamber pressure is controlled so that it is always higher than that inside the vessel, the product inside the vessel cannot get past the mechanical seal. However, the unavoidable leakage of seal liquid past the inboard sealing rings will enter the vessel, while leakage past the outboard pair of sealing rings will enter the surroundings.

The design principles of mechanical seals can be divided into single- and double-acting seals. Another differentiating feature is the type of seal-ring lubrication: dry-running, gas-lubricated or liquid-lubricated.

Single-acting mechanical seals. The key design feature of single-acting mechanical seals is that they have only two seal rings. This means they have only one interface and no seal-liquid chamber. A key characteristic of single-acting mechanical seals is that they can leak into the surroundings of the vessel. The leakage rates are generally not high: about 10–100 mL/hr of gas for dry-running seals and 10–50 mL/d of liquid for side-entry mechanical seals. This means that the vessel is not technically tight, in contrast to double-acting mechanical seals. Therefore, this seal design cannot be used when hazardous materials are to be mixed.

Although dry-running mechanical seals do not need seal-liquid supply systems and their corresponding monitoring devices, the seal rings


are subject to relatively high wear. The service life is therefore much lower than that for liquid-lubricated mechanical seals. Nevertheless, dry-running mechanical seals can achieve service lives of a year or more under appropriate operating conditions.

Liquid-lubricated single-acting mechanical seals can achieve much longer service lives, where the nature of the product allows them to be used. Many applications involve suspended solid particles that—depending on their hardness and particle-size distribution—can greatly influence the service life of the seal rings. These seals are generally equipped with two seal rings made from abrasion-resistant silicon carbide (SiC). However, the use of two hard materials is not ideal with respect to sliding friction. In this case, it is usually better to use a softer material for one of the faces, accepting higher wear in return for lower friction.

Double-acting mechanical seals. Double-acting liquid-lubricated mechanical seals are the most common type for mixing applications, where they can be used under nearly all operating conditions. They are also available in gas-lubricated variants, in which a continuous supply of gas into the seal chamber maintains a seal gap of a few micrometers, thus preventing wear of the seal rings. The characteristic feature of a double-acting mechanical seal is its seal-fluid chamber that can be filled with seal liquid or gas, thus separating the interior of the vessel from its surroundings.

Figure 2 shows how the various types of seals discussed above score against process parameters such as temperature and pressure, plus broader criteria like cost and service life. It is obvious that mechanical seals offer many advantages over the other types. Particularly if hazardous or

explosive materials are being mixed, a mechanical seal is practically mandatory. A hermetic seal with a canister in combination with a mechanical seal is used for applications requiring the highest safety, such as hydrogenation or phosgenation reactions.

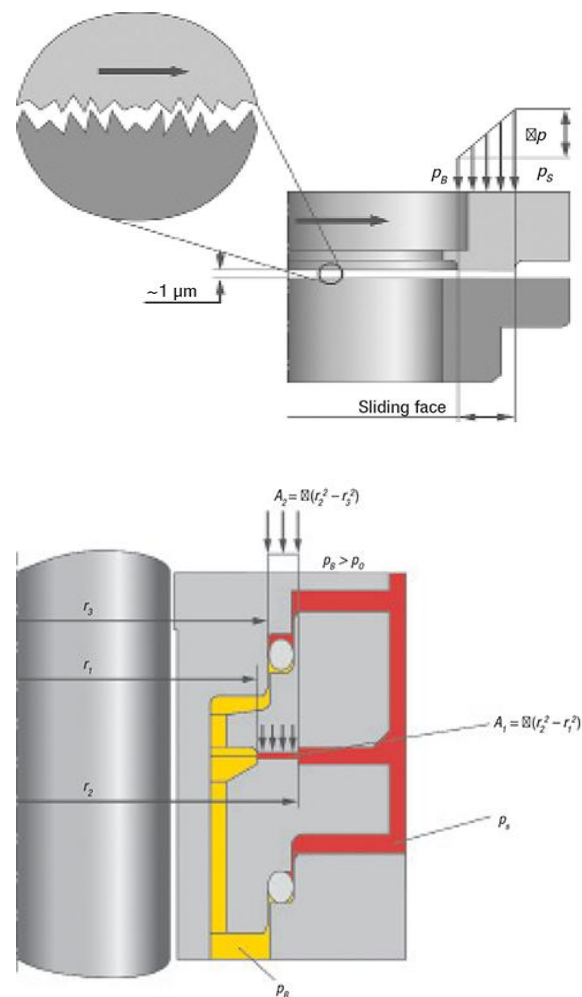


Anushka Mishra

Continuous Flow Systems

Water cooling systems and circulation pumps are not very popular because the necessary pipework and pumps increase the capital outlay. They also consume water and electricity, and require extra maintenance.

Fortunately, simple sealing tasks do not require these additional elements if we exploit the thermo siphon effect to circulate the seal liquid, and natural convection in the surrounding air for cooling (Figure 8). Hot liquid has a lower density than cold liquid, so it rises into a storage vessel mounted above the seal. Natural cooling of the liquid storage vessel then sets up a circulation through the seal. The storage vessel can also be cooled with a water jacket instead of air. A supply of compressed gas is required to pressurize the storage vessel.

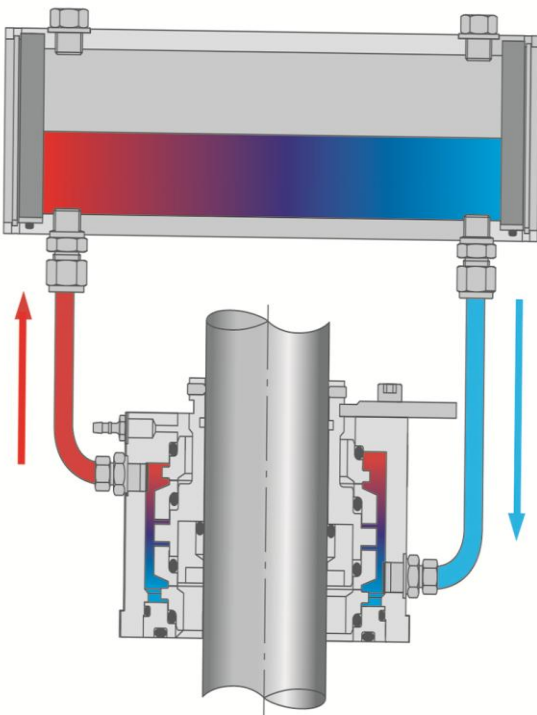

If the thermosiphon effect is insufficient to remove the generated heat quickly enough, the seal liquid must be circulated with a pump.

Natural convection cooling with air must also be replaced or supplemented by forced cooling with liquid, for instance cooling coils in the storage vessel.

The resulting forced circulation cooling system (Figure 9) can only operate reliably if it is equipped with suitable monitoring instruments, such as flowmeters and temperature sensors. The most important component in terms of safety is the pressure control valve. This ensures that the pressure in the seal-liquid circuit is always greater than the vessel pressure. The usual arrangement is to set the seal-liquid pressure at a fixed value 10% above that of the maximum vessel pressure.




Also important to safety is an accumulator. If the circulation pumps should fail, for instance following a power failure, the high pressure in the seals is maintained by valves. During this time, the accumulator ensures that the pressure in the seal-liquid circuit remains higher than in the vessel, and also supplies more seal liquid to replenish leakage.

Pressure Compensators

An alternative to setting the seal-liquid pressure at a fixed value is to use a pressure compensator. This allows the seal-liquid pressure to follow the vessel pressure. A pressure compensator is a hydraulic cylinder in which a piston acts as a divider between two fluid chambers (Figure 10).


The lower face of the piston is subjected to the vessel pressure p_B , while the seal-liquid pressure p_S acts on the upper face. The area of the lower face (A_B) is shown by the yellow circle in Figure 10; the upper face has a smaller area (A_S) because the piston rod occupies some of the top surface, as the red “doughnut” in Figure 10 shows. The force balance is:

$$p_B \times A_B = p_S \times A_S \quad (2)$$

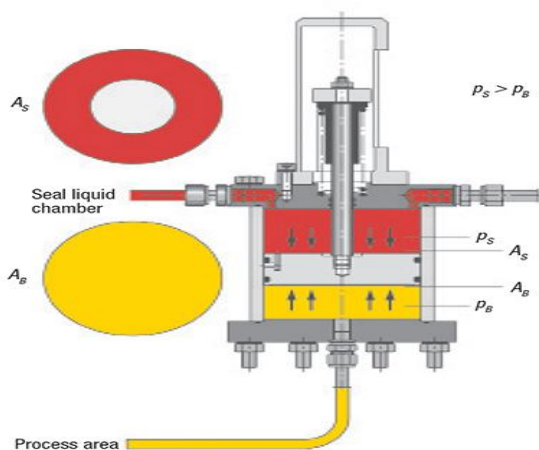

Because $A_B/A_S > 1$, $p_S > p_B$. The area of the piston rod is arranged so that the pressure in the seal liquid is always higher than the vessel pressure by the required differential.

As Figure 3 shows, the lower chamber of the pressure compensator is connected to the headspace of the vessel via the seal flange. The upper chamber is connected to the seal-liquid chamber. This arrangement ensures that the pressure in the seal-liquid chamber automatically follows the vessel pressure

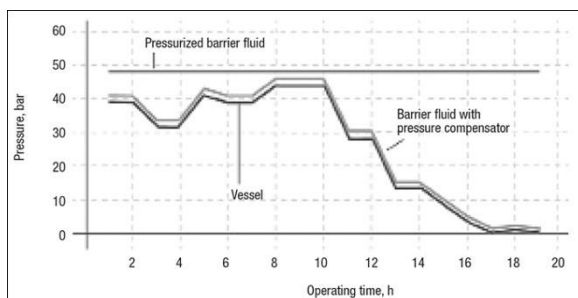

The inboard pair of seal rings is generally regarded as

particularly critical because these rings are directly exposed to the process, and so bear the brunt of corrosion, erosion and high temperatures. Under varying operating conditions, such as those found in batch processes or during commissioning, a pressure compensator can reduce wear on these rings by dropping the seal-liquid pressure to the minimum safe value. Pressure compensator systems are generally equipped with a manually controlled pump for refilling. An automatic refill system is recommended if there is more than one agitator (Figure 12) to exclude possible errors by operating personnel. Position monitoring of the pressure-compensator piston (Figure 3) provides very sensitive monitoring of the leakage behavior of each individual seal. This enables countermeasures to be started in good time if premature failure of the seal is imminent.



Krishna Ojha

Optimizing Pressure Relief Systems

Alternative designs for pressure relief systems may offer investment cost savings

Pressure relief systems for the chemical process industries (CPI) are essential to prevent a process system, or any of its components, from being subjected to pressures that exceed the maximum allowable accumulated pressure, by emergency venting to a closed relief system.

These relief systems are normally very conservatively designed. For large, new petroleum refineries with capacities around 300,000 barrels/day (bbl/d), this can result in costs of up to 1% of the total refinery capital investments (Capex)

Overpressurization of process units can occur due to several reasons as indicated in API-52. Some of those reasons are the following:

- General power failure
- Cooling water failure
- Instrument failure
- External fire

Normally, general power failure or utility failure results in the highest vapor load for a closed pressure-relief system, and is therefore used as the design case. Before sizing a closed relief system, it is advisable to reduce these very high vapor loads by the following:


1. Use high-integrity protection systems (HIPS) as recommended in API-521, which can result in a significant reduction of the vapor flowrates to the flare.
2. Realize dynamic-system load modeling. This analysis for a complete petroleum refinery is very complex and is not

normally used, but it can also result in flowrate reductions.

After defining the minimum possible vapor flowrates that correspond to the overpressure relieving rates defined by the design case, the closed relief system may be sized.

Traditional Closed Systems

A closed pressure-relief system is designed to safely control over pressurization of process units during emergencies by relieving the vapors to the flare, which destroys hydrocarbons in a high-temperature flame. Figure 1 shows a typical closed relief system that collects vapors and liquids in process-unit headers and separates the liquid in process-unit knockout (KO) drums before sending the vapor phase to the main flare header, and finally to the flare unit for destruction.

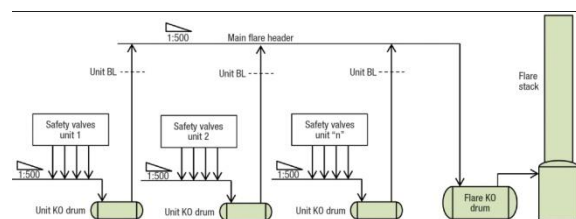

In the traditional system, the unit KO drums and the flare KO drums are projected for the maximum vapor and liquid flowrates as determined from the analysis of the overpressure causes and indicated in API-521.

The KO drums, process units and flare unit, are sized to separate particles in the range of 300–600 μm in diameter, and to hold liquid discharge for 20 to 30 minutes as per API-521 item 7.3.2.1.2 for these maximum flow conditions.

The unit flare headers and the main flare header are also sized for these maximum flowrates. All

the headers slope with a minimum inclination of 1:500 toward their respective KO drums, and are continuously purged using combustion gas or nitrogen from the upstream end toward the KO drums to avoid ingress of air into the system.

Optimized Closed Systems



The calculation criteria for sizing the flare KO drums and process-unit KO drums result in very large vessels. This implies the need to install the collection headers very high above grade level, since they must drain to the KO drums. Equipment, such as air coolers that must be mounted above the process unit headers are consequently also very high. This requires long stretches of process piping to and from the equipment. Figure 2 shows such a situation.

If it was possible to change the design criteria for the process-unit KO drums, the process-unit flare header and the air coolers may be installed at a lower level with considerably lower installation costs as a result of the use of less structural steel and process- and flare-header piping.

At the flare unit, the KO drum is even larger than the process unit drums, and as a result, the main flare header at the inlet to the vessel is very high, as can be seen in Figure 3. Consequently, the main flare header at the flare-unit battery limits (BL) is also very high. Since the flare header in large, new, petroleum refineries is normally very

long (about 2 km), it means that at the farthest point from the flare unit the header is at least 5 m higher than at the flare-unit battery limits. This installation requires a lot of structural steel to maintain the flare header at the required height, and consequently high investment costs for the pipe rack are required (Figure 4).

The criteria used to size the KO drums for carryover of droplets that are 600 μm in diameter is, according to API-521, to eliminate the possibility of incomplete combustion with excessive smoking, possible “burning rain,” and even flame-out of the flare.

It is clear that the flare unit KO drum must be sized according to this limitation as it is upstream of the flare. However, this limitation is not necessary for the process unit vessels, as these are upstream of the flare-unit KO drum. In this case, if large droplets are carried over from the process-unit KO drums, the flare-unit KO drum will retain them and maintain adequate conditions for the flare.

API-521 item 6.4.3.6.7 presents a clear explanation of the design parameters for these vessels:

“Some flare systems require a flare knockout drum to separate liquid from gas in the flare system and to hold the maximum amount of liquid that can be relieved during an emergency situation.


“In general, a flare can handle small liquid droplets. However, a knockout drum is required to separate droplets larger than 300 μm to 600 μm in diameter in order to avoid burning liquid outside the normal flame envelope. If unit knockout drums are provided upstream, Knockout drums are typically located on the main flare line

The height of the process unit header is lower, which saves on structural steel in the pipe rack

- The arrangement of the process unit header can be simplified, resulting in a smaller total length
- Air coolers, if installed, can be lowered, reducing process piping to and from the equipment
- Reduced weight of the pipe rack and KO drum reduces foundation requirements
- These vertical KO drums can be designed without internals, and with the outlet flare nozzle at 180 deg from the inlet nozzle and at the same elevation, as the liquid droplet carryover is not in question. However, the designer should avoid very large droplet carryover, which results in vessels with a smaller length-to-diameter ratio than usual for vertical gas-liquid separation vessels. The reason to remove very large droplets in the process units is not to overload, with liquid, the new main header proposal presented below.

- As can be seen in API-521 item 6.4.3.6.7 (quoted earlier), process-unit KO drums are not mandatory. But, because condensation always occurs in flare headers, it is recommended to maintain the process-unit KO drum unless this header can be drained to the main flare header outside the battery limit (OSBL).
- This change of design criteria for the process-unit KO drums will reduce the vessel volume by up to 80%, resulting in a considerable investment-cost reduction for the inside the battery limit (ISBL) relief system.

- OSBL cost reductions may be obtained for the main flare header by reducing the elevation above grade level of this very large (diameters around 80 in.) and long pipe. This can be done in two steps — the first of which is to reduce the header height at the flare unit battery limits. This may be done by a simple alteration of the header’s inlet piping arrangement to the very large, horizontal flare-unit KO drum — which can be over 8-m dia. — by changing the vertical inlet connections to horizontal ones, as indicated in Figure 5. In large petroleum refineries, this alteration to the inlet connections can result in a reduction of the header height at the flare unit battery limits by more than 4 m.

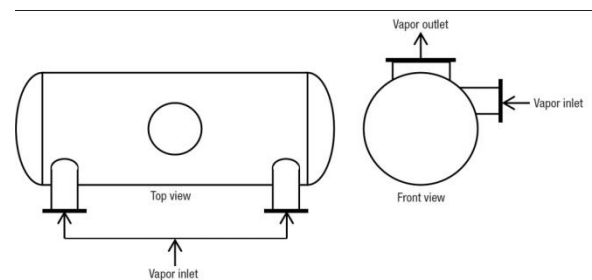

The second step is to reduce the large increase in height of the main flare header from the flare unit to the farthest process unit because of the required slope of 1:500. This may be achieved by installing a vessel and pumps along the pathway to collect condensate, thus dividing the header into two approximately equal parts. The first part is from the farthest process-unit drains to the header collection vessel, and the second is from this vessel to the flare-unit KO drum (an intermediate main-header KO drum).

This suggestion is based on API-521 item 7.3.1.3.8, which states: “A small drain pot or drip leg can be necessary at low points in lines that cannot be sloped continuously to the knockout or blowdown drum.

Cost Savings

As can be seen from the above discussion focused on petroleum refineries, fairly simple project considerations can reduce the cost of construction of a closed pressure-relief system. It is possible to significantly reduce the size of the process-unit KO drums, while at the same time save considerable structural steel used for the ISBL and OSBL pipe racks. It is also indicated that by careful calculations of the closed flare system with integration of the ISBL with OSBL, it is possible to reduce the flare header diameters. In comparison with the traditional approach, this new manner to project the pressure relief system offers a reduction of about 30% in the height of the main flare header and around 20% in the height of the unit flare headers. This together with the much smaller unit KO drums, reduced header diameters and less process piping for the lowered air coolers, permits an investment cost reduction for the relief system of up to 20% as compared with the traditional project.

Kushagra Jain

Focus on Industrial Hygiene

This Hood Captures Unwanted Fumes from Work Spaces



The Purair Advanced P20 Ductless Fume Hood (photo) is designed to protect workplace operators from hazardous substances. It provides a face velocity of 100 ft/min to contain fumes. The unit is 49-in. wide, by 27.5-in. deep, by 47.5-in. high. Other sizes are available up to 96 in. wide. The primary filter can be chosen from 14 different types of carbon, including specialty media that is designed to remove vapors of organic compounds, solvents, acids, mercury and formaldehyde. HEPA filters for the removal of particulate solids are also available, to suit specific application needs. The Purair can also be equipped with a secondary backup filter to meet ANSI Z9.5 section 4.12 4.2 requirements. An alarm alerts operators when the airflow falls to an unacceptable level. Switches and electrical components are isolated from the contaminated airflow. The work area has a removable, cleanable spillage tray. Optional integral lighting is available.

Mezzanine Gate reduces the Risk Of Worker Falls and Injuries

The Protect-O-Gate Pivot Gate (photo) can be customized to accommodate various configurations. The pivot gate eliminates the potential for falls and other accidents often associated with mezzanine loading areas. The unit is counter-balanced and operator-friendly, says the company, to provide easy access to staging areas. Unlike conventional devices, such as chains, lift-out gates and sliding gates, this pivot gate cannot be bypassed. When the enclosure closest to the edge of the mezzanine is lifted to allow load delivery, the second enclosure rests on the mezzanine, protecting personnel from potential falls. Custom sizing is available, with optional increased loading height available to 80 in. Any dimensions can be modified to meet your specifications. The unit is shipped assembled, so it can be bolted to the mezzanine floor and put into operation immediately.

These Absorbent Products Help Ensure Workplace Safety

The eco-friendly Oil Eater Naturals line of absorbent pads, rolls and socks (photo) is available to help facility personnel respond to spills and leaks in the workplace — anywhere drips or spills can cause slippery conditions. The product line is made from natural plant byproducts and has woven construction. Oil-Only pads and rolls soak up oil and repel water. Universal Pads and Rolls soak up oil, water and other liquids. Absorbent socks are available to contain larger spills and protect drains. All come in various weights, finishes and sizes.

Electrical Enclosures Can Be Modified To Add Height

This company's standard 72-in.-tall cabinets and enclosures (photo) can be customized to a height of 90-in., to meet user requirements, when floor space is limited but vertical space is available.

The company has modified its two-door, floor-standing 1422 and HN4FM series, and the single-door free-standing 1418 and HN4FS series (to 90-in. height), all of which are available in either painted mild steel, or 304 or 316L stainless steel construction. When used to house control or electrical equipment, the larger surface area of the taller metal cabinets also improves conduction, which can help to reduce cooling needs and thus reduce energy use.

This Small-Scale Workstation Captures Fumes



The MicroFlow II is a small-scale, Class 1 ductless carbon-filtered workstation (photo). It is designed for general chemistry applications involving the handling of small volumes of chemicals, such as solvent cleaning of electronic parts, tissue staining and processing, gluing and drying operations, soldering applications, and more. It is equipped with activated carbon filtration, to capture fumes, odors and non-hazardous chemical vapors. It is completely self-contained with an integral, recessed work surface to contain spills. Variable-speed fan control allows for high-speed 100-ft/min air flow through the sash. A light indicates when it is time to replace the filter.

Surveillance Camera Provides extended Wi-Fi Range

The Apollo Pro Camera allows facility managers to maintain surveillance, to monitor day-to-day operations for workplace safety, quality control,

theft prevention and remote monitoring. Its long-range capabilities provide three times the Wi-Fi range of other competing cameras, says the company, and this allows operators to carry out security surveillance coverage in places never before possible. The Apollo Pro is equipped with a wide viewing angle, and advanced night vision capabilities provide clear viewing in dark conditions. A free app allows users to set up, view, listen, talk to, control and edit all of their Apollo Cameras from any device.

XenonStrobe Beacons Have Multiple Configuration Options



To complement its GNEx family of alarm horn sounders, loud speakers and manual call points for activation of fire alarms, gas detection and emergency-shutdown systems, this maker of audible and visual warning signals now offers the BNEx GRP Xenon strobe beacons (photo). Suitable for all Zone 1, 2, 21 and 22 hazardous location applications, the explosion-proof and corrosion-resistant GNEx beacons have extended temperature range with IECExad ATEX Ex d approvals. For signaling in applications with high ambient light, or for long-distance signaling, the GNExB2 beacon is available in 10, 15 and 21-Joule variants, producing a very high output Xenon strobe. Both 15- and 21-Joule versions can be supplied with a plate-mounted assembly configured with up to four xenon strobe beacons with a junction box, or five beacons without a junction box

Response Kits Help Personnel Deal with Industrial Spills




The TaskBrand Spill Kits (photo) are available to help plant personnel respond immediately to liquid spills, leaks or discharge of hazardous chemicals. The kits can be configured to contain different types of spill-response products, so they are ready for potential scenarios that could occur in different areas of the plant. For example, kits are available for universal spill types, for oil-only spill types, and for chemical applications. The TaskBrand kits come in 5-, 20-, 30-, and 65-gal capacities, and include gloves, safety goggles, a reusable bucket or laboratory pack/overpack, and the appropriate number of socks, pads and can liners to allow plant personnel to respond to spills. A vehicle spill kit is also available, consisting of two pads, two sorbent socks, and two clean-up bags

Low-Profile Led Light Fixture Is Rated For 100,000 H of Service

The HAL-LED-CPR-40 is a 40-W, low-profile, LED light fixture that is approved for Class 1, Division 2 hazardous locations, while also carrying an ATEX Zone 1 and 2, as well as PSE and SAA certifications. It is said to provide a powerful and energy-efficient alternative to metal halide luminaries. This hazardous-area light fixture provides 4,000 lumens of light, while drawing only 40 W of power. It is constructed of durable, die-cast aluminum and comes with a tempered-glass lens that provides protection for the 24 individual LEDs that deliver high-quality light in a 120-deg beam spread.

Uday Dhakad

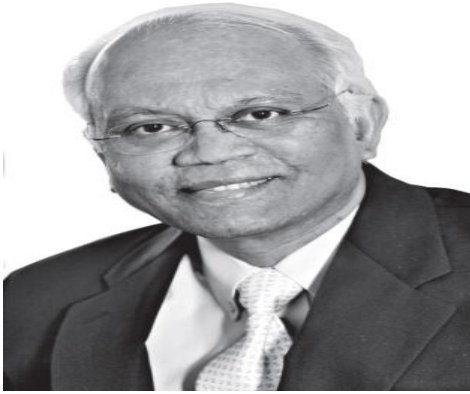

Dr. R.A. Mashelkar

Chairman, National Innovation Foundation
India

Dr. R.A. Mashelkar is presently a National Research Professor and also the President of Global Research Alliance, a network of publicly funded R&D institutes from Asia-Pacific, Europe and USA with over 60,000 scientists.

Dr. Mashelkar served as the Director General of Council of Scientific and Industrial Research (CSIR), with thirty-eight laboratories and about 20,000 employees for over eleven years. He was also the President of Indian National Science Academy.

Deeply connected with the innovation movement in India, besides being a Member of Prime Minister's National Innovation Council, Dr. Mashelkar is also the Chairman of India's National Innovation Foundation, Reliance Innovation Council, Thermax Innovation Council, Marico Innovation Foundation and KPIT Technologies Innovation Council.

Dr. Mashelkar is a Fellow of Royal Society (FRS), London, Foreign Associate of National Academy of Science (USA), Foreign Member, American Academy of Arts & Sciences (2011); Foreign Fellow of US National Academy of Engineering (2003); Fellow of Royal Academy of Engineering, U.K. (1996), Foreign Fellow of Australian Technological Science and

Engineering Academy (2008) and Fellow of World Academy of Arts & Science, USA (2000).

Dr. Mashelkar is on the Board of Directors of several reputed companies such as Reliance Industries Ltd., Tata Motors Ltd., Hindustan Unilever Ltd., GeneMedix Life Sciences Ltd., Piramal Enterprises Ltd., and KPIT Technologies Ltd.

In the post-liberalized India, Dr. Mashelkar has played a critical role in shaping India's S&T policies. He was a member of the Scientific Advisory Council to the Prime Minister and also of the Scientific Advisory Committee to the Cabinet set up by successive governments. He has chaired twelve high powered committees set up to look into diverse issues of higher education, national auto fuel policy, overhauling the Indian drug regulatory system, dealing with the menace of spurious drugs, reforming Indian agriculture research system, etc.

In August 1997, Business India named Dr. Mashelkar as being among the 50 path-breakers in the post- Independent India. In 1998, Dr. Mashelkar won the JRD Tata Corporate Leadership Award, the first scientist to win it. In June, 1999, Business India did a cover story on Dr. Mashelkar as "CEO OF CSIR Inc.", a dream that he himself had articulated, when he took over as DG, CSIR in July 1995. On 16 November 2005, he received the Business Week (USA) award of 'Stars of Asia' at the hands of George Bush (Sr.), the former President of USA. He was the first Asian Scientist to receive it.

Thirty universities have honoured him with honorary doctorates, which include Universities of London, Salford, Pretoria, Wisconsin and Delhi.

The President of India honoured Dr. Mashelkar with Padmashri (1991) and with Padmabhushan (2000) in recognition of his contributions to nation building.

Deepshikha Mishra

Geothermal energy



Steam rising from the Nesjavellir Geothermal Power Station in Iceland.

Geothermal energy is thermal energy generated and stored in the Earth. Thermal energy is the energy that determines the temperature of matter. The geothermal energy of the Earth's crust originates from the original formation of the planet and from radioactive decay of materials (in currently uncertain^[1] but possibly roughly equal^[2] proportions). The geothermal gradient, which is the difference in temperature between the core of the planet and its surface, drives a continuous conduction of thermal energy in the form of heat from the core to the surface. The adjective geothermal originates from the Greek roots $\gamma\eta$ (ge), meaning earth, and $\theta\epsilon\rho\mu\omicron\varsigma$ (thermos), meaning hot.

Earth's internal heat is thermal energy generated from radioactive decay and continual heat loss from Earth's formation.^[3] Temperatures at the core–mantle boundary may reach over 4000 °C (7,200 °F).^[4] The high temperature and pressure in Earth's interior cause some rock to melt and solid mantle to behave plastically, resulting in portions of mantle convecting upward since it is lighter than the surrounding rock. Rock and water is heated in the crust, sometimes up to 370 °C (700 °F).^[5]

From hot springs, geothermal energy has been used for bathing since Paleolithic times and for space heating since ancient Roman times, but it is now better known for electricity generation. Worldwide, 11,700 megawatts (MW) of

geothermal power is online in 2013.^[6] An additional 28 gigawatts of direct geothermal heating capacity is installed for district heating, space heating, spas, industrial processes, desalination and agricultural applications in 2010.^[7]

Geothermal power is cost effective, reliable, sustainable, and environmentally friendly,^[8] but has historically been limited to areas near tectonic plate boundaries. Recent technological advances have dramatically expanded the range and size of viable resources, especially for applications such as home heating, opening a potential for widespread exploitation. Geothermal wells release greenhouse gases trapped deep within the earth, but these emissions are much lower per energy unit than those of fossil fuels. As a result, geothermal power has the potential to help mitigate global warming if widely deployed in place of fossil fuels. The Earth's geothermal resources are theoretically more than adequate to supply humanity's energy needs, but only a very small fraction may be profitably exploited. Drilling and exploration for deep resources is very expensive. Forecasts for the future of geothermal power depend on assumptions about technology, energy prices, subsidies, and interest rates. Pilot programs like EWEB's customer opt in Green Power Program.

Kanak Goyal